



Network Camera

IP946C24M

Specification (V 1.0)

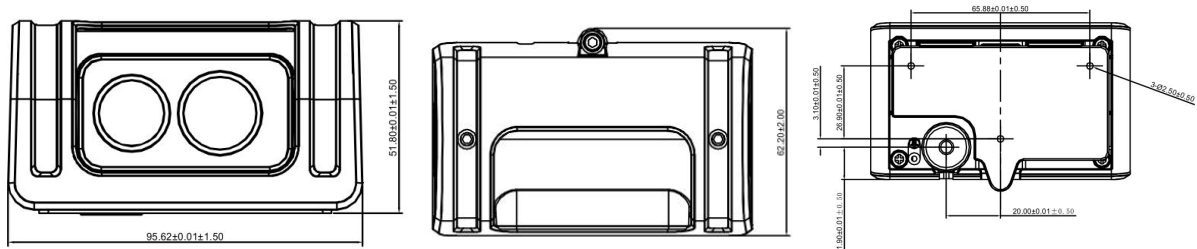


- 1/2.8" 2.13M pixel CMOS
- Infrared range up to 15-20M
- IP69K-rated for dust and water protection
- Supports exterior and upright installation
- Supports HTML5 and is compatible with Edge and Google Chrome browser

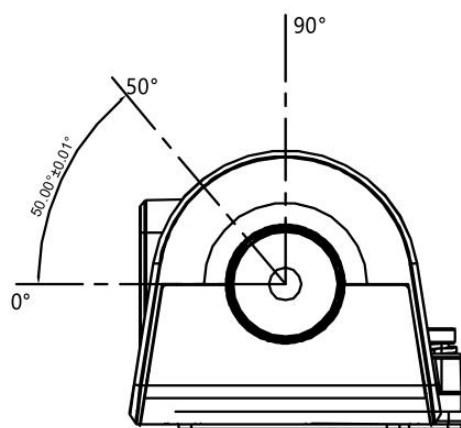
Specifications	
Name	Parameter
Product Model	IP946C24M
Resolution Ratio	1920H*1080V
Sensor Type	1/2.8" 2.13M pixel CMOS
Minimum Illumination	0lux (IR on)/0.05lux (colour)
Lens/FOV	Support: 2.8mm, 4mm, 6mm, 8mm 2.8mm=H*V 98°*54° 4mm= H*V89° 46° 6mm= H*V 54° 29° 8mm= H*V 41° 23°
Infrared Detection Range	Up to 15-20M
Shutter Speed	1/30s to 1/50,000s (automatic shutter)
Video Resolution / Frame Rate	Main stream: 1080P/720P @30FPS Default 1080P @30FPS
	Sub stream: VGA/D1/CIF @30FPS default VGA @10FPS
	Network streaming code: VGA/D1/CIF@30FPS default VGA @10FPS
Video Bit Rate	Main stream: 1024Kbps-8192Kbps sub-stream: 640Kbps-2048Mbps
Audio Compression	No audio output
Network Port	10M/100M adaptive Ethernet port
Network Protocol	TCP/IP、HTTP、DHCP、NTP、FTP、ONVIF
Coding Mode	Supports CBR/VBR with default VBR
Signal-to-Noise Ratio S/N	≥ 50dB

Day and Night Mode	ICR auto switch
Scanning System	Progressive scan
Synchronous System	Inter-sync
White Balance	Supported
Automatic Gain	Supported
3D Noise Reduction	Supported
Backlight Compensation	Supported
Power Source	PON (DC9-16V)
Power Consumption	PON<3W (IR off) <5W (IR on)
Operating Temperature	-40°C~ 70°C(-40°F ~ +158°F)
Operating Humidity	≤90% (no condensation)
Protection Rating	IP69K
Product Dimension	L95.6mm × W62.2mm × H51.8mm (L3.76" × W2.45" × H2.04")
Package Dimension	L133mm × W100mm × H108mm (L5.24" × W3.94" × H4.25")
Net Weight	389g(0.86lb)
Gross Weight	432g(0.95lb)

Dimension Diagram

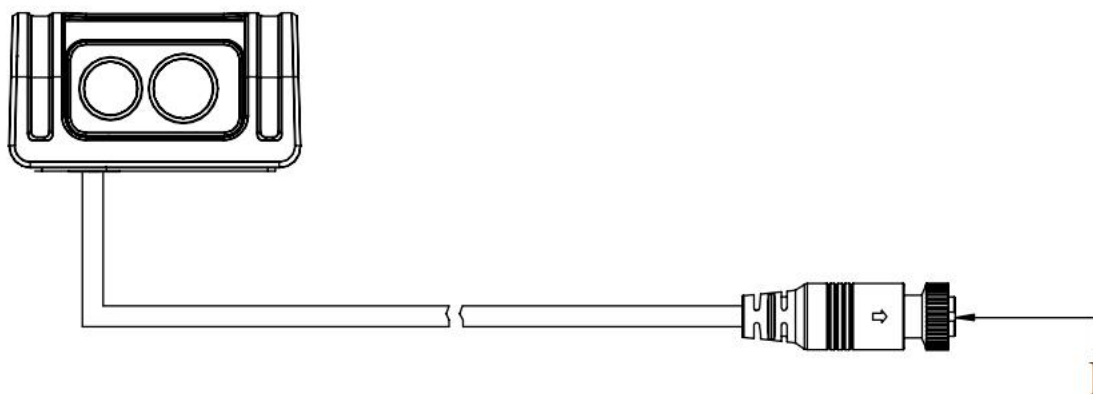


Product size diagram

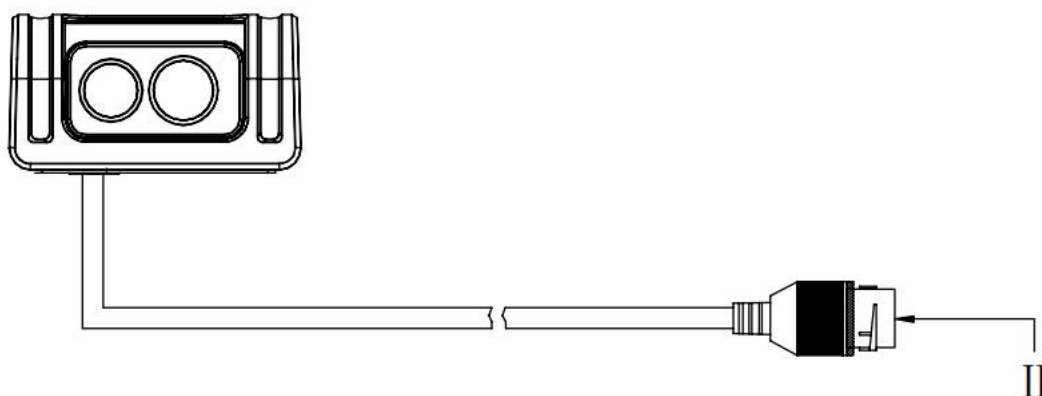


Adjustable Angle diagram -- vertical 50°







Cable Details



PON standard 6-core aviation head -- Default 0.5 m (tail line length)



PON standard RJ45 connector -- Default 0.5 m (tail wire length)

order	name	description																
I	PON 6-pin aviation head output interface	<table><tr><th>Line order</th><th>No.</th><th>Name</th></tr><tr><td rowspan="6"></td><td>1</td><td>TX -</td></tr><tr><td>2</td><td>TX +</td></tr><tr><td>3</td><td>12V</td></tr><tr><td>4</td><td>RX -</td></tr><tr><td>5</td><td>RX +</td></tr><tr><td>6</td><td>GND</td></tr></table>	Line order	No.	Name		1	TX -	2	TX +	3	12V	4	RX -	5	RX +	6	GND
Line order	No.	Name																
	1	TX -																
	2	TX +																
	3	12V																
	4	RX -																
	5	RX +																
	6	GND																
II	PON RJ45 output interface	<table><tr><th>Line order</th><th>No.</th><th>Name</th></tr><tr><td rowspan="6"></td><td>1</td><td>TX +</td></tr><tr><td>2</td><td>TX -</td></tr><tr><td>3</td><td>RX +</td></tr><tr><td>6</td><td>RX -</td></tr><tr><td>4+5</td><td>12V</td></tr><tr><td>7+8</td><td>GND</td></tr></table>	Line order	No.	Name		1	TX +	2	TX -	3	RX +	6	RX -	4+5	12V	7+8	GND
Line order	No.	Name																
	1	TX +																
	2	TX -																
	3	RX +																
	6	RX -																
	4+5	12V																
	7+8	GND																