

SP-T01 Printer Specifications



Specifications:


Model:		
SP-T01 Printer		
Port		
Serial Port		RS232
Device Parameter		
Printing Method		Thermal printing
Printing Speed		About 70mm/sec at 25% character rate
Print Width		57 ± 0.5mm
Print Density		384 points per row
Resolution		203 DPI
Paper Type		Thermal Paper
Paper Size		Width: 57mm , Diameter:40mm , Thickness:0.06~0.08mm
Card Reader		
Head specification		GK36110B19F99
Card specification		Supports 1/2/3 magnetic stripe cards
Swipe speed		15--120 cm/sec
Power Supply		
Input		DC 9-16V 2A
Peek Power		24W
Environment		

Operating Temperature	-10℃~60℃
Humidity	10~90% RH (no condensation)

Device Size

Length x width x height	118.5 x 81 x 50
Weight	About 170G

Appearance:

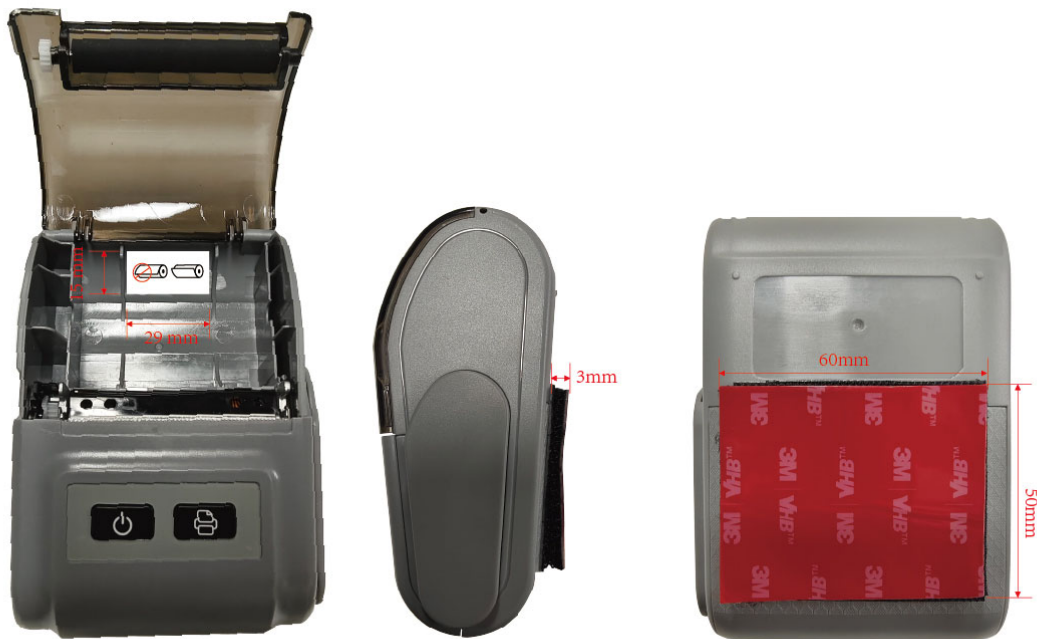

Indicator status indication:

- In the working state, the working status indicator light is long on;
- During the communication, the working status indicator blinks (on for 0.5 seconds, off for 0.5 seconds).
- When the paper is lacking, the paper light flashes;

- When you enter the upgrade state and request firmware delivery, the working status indicator is on and off. When receiving firmware, the operating status indicator blinks rapidly (on for 0.1 seconds, off for 0.1 seconds).

