

LED alarm panel



Main Features

- ◆ With panic alarm function
- ◆ With frequent buzzer sound to warn the driver in case of over speeding
- ◆ With light sensor to auto adjust the brightness of the display light
- ◆ Small 5559 interface, with plastic buckle design to ensure the connection reliability under the vehicle vibration environment


Overview


Streamax LED alarm panel is an alarm display panel specially developed for the vehicle monitoring market, which is capable of displaying the recording status and malfunction alarm status of Mobile digital video recorder with low power consumption, high efficiency, and easy installation.

Specification

	Items	Specification
Ports	Port form	Small 5559 port 4P
	Port No.	1
Power	Power consumption	≤0.4W
	Input Power	DC5V/12V
Others	LED	PWR/ALM/REC/ERR
	Dimension (mm)	59.8 x 50.85 x 22.4
	Weight	35g
	Operating Environment	Working Temperature: -40℃ ~ 70℃ Storage Temperature: -40℃ ~ 85℃ Working Humidity: 10% ~ 90%RH Non-condensing Storage Humidity: 5% ~ 95%RH Non-condensing

Dimension(Unit: mm)

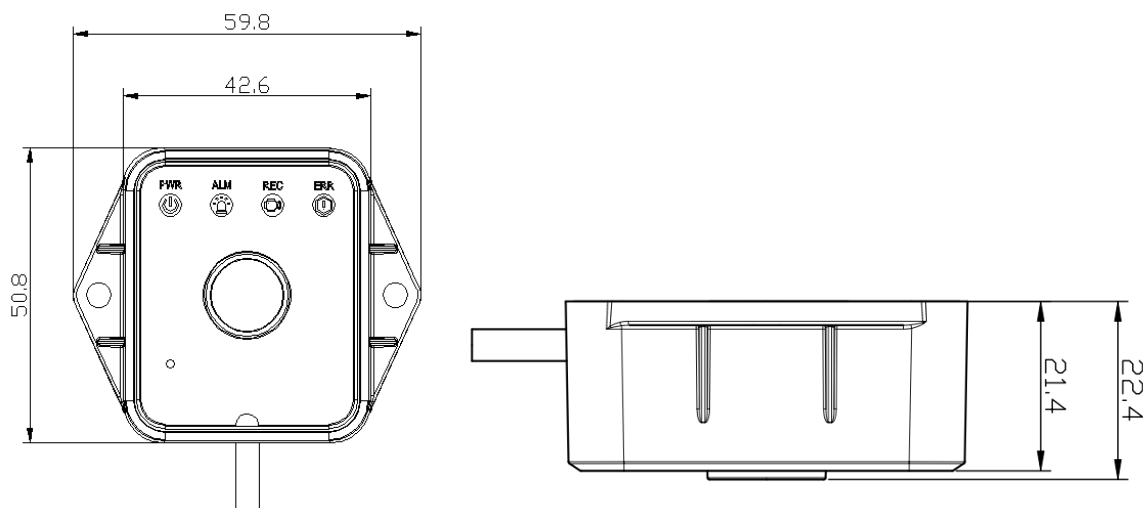


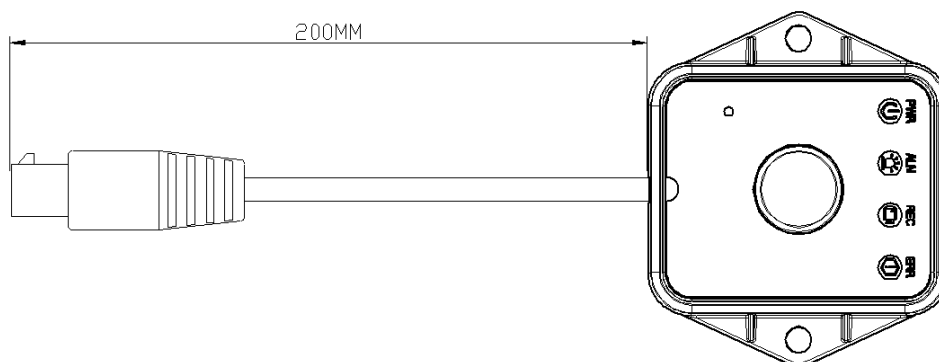

Print Description

No.	Print	Description
1	PWR	Blue: Light is on when power is on, and light is off when power is off.
2	ALM	Red: Light is on when there is alarm, and light is off when there is no alarm.
3	REC	Green: Light is one when it is recording, and light is off when there is not recording.
4	ERR	Orange: Light is on when there is malfunction, and light is off when it works well.

Cable Definition

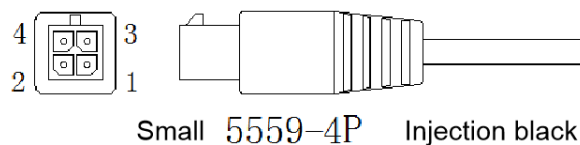

Diagram

Small 5559-4Pin	TJC3-4P-P1.25
485B 2	4 Brown and white
485A 3	3 Brown
GND 4	2 Black
+5V 1	1 Red