

Camera C6A



Main Features

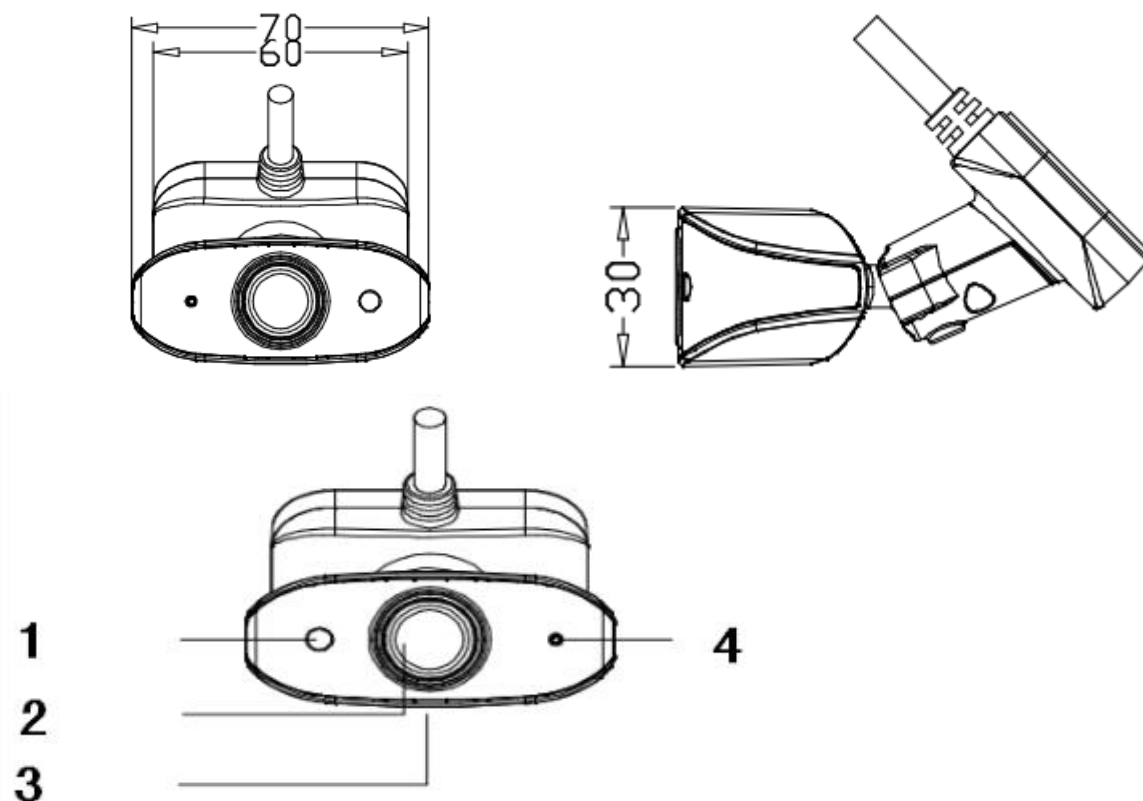
- ◆ 1.3M pixel CMOS
- ◆ 2.3mm
- ◆ Easy to assemble and install; lockable angle and anti-vibration design
- ◆ Aluminum alloy shell, good heat dissipation
- ◆ Compact size, light weight
- ◆ Application: taxi

Overview

Streamax camera housing is made of metal and built to survive in rugged and vandal susceptible environments. Vibration and thermal tested, the powerful camera is an excellent choice for taxi surveillance system. Utilizing the Sony CMOS imaging sensor, it provides outstanding image quality in both day and night lighting conditions. Besides, it also included an integrated Microphone which is able to captures clear audio of driver and passengers. As for its compact size, it can installed with the rearview mirror and will not affect driver driving.

Specification

Model	SVT-A6210W(AHD 720P)	SVT-M5270W(CVBS 700TVL)
CMOS	1/3" 1.3M pixel CMOS	1/3" CMOS
Resolution	1280(H)x720(V)	700 TVL
Format	NTSC/PAL	
Minimum illumination	0.05Lux(Color illumination),F1.2	0.1Lux(Color illumination),F1.2
IR distance	3~5m	5~8m
S/N	≥52dB	≥45dB
Lens	2.3mm M12, Fixed apertureF1.8	2.3mm M12, Fixed apertureF1.8
FOV(4mm)	H*V 115° *64.5°	H*V 115° *64.5°
Video output	1.0Vp-p AHD video output 75 Ω, 4pin DIN JACK	1.0Vp-p composite video output, 75 Ω, 4pin DIN JACK
Audio	Built-in mic	
Power	DC12V± 10%	
Consumption(Max.)	140mA/DC12V ±5%	130mA/DC12V ±5%
Working temperature	-40°C ~ 70°C	
Dimension	85.6(L)*40(W)*70(H)mm	
Weight	About 120g	

Dimension (Unit: mm)

No	Definition
1	Light Sensor
2	Cabin camera lens
3	Cabin camera screw
4	MIC

Solution Reference

